Våra dräneringstråg | ClimaLine Pro Serien | Pro 6

ECO Eco version -34°

CLIMACO

Cookiebot by Usercentrics

Consent | Details | About

This website uses cookies

We use cookies to personalise content and ads, to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media, advertising and analytics partners who may combine it with other information that you've provided to them or that they've collected from your use of their services.

Necessary


Preferences

Statistics

Marketing

Allow selection

Allow all

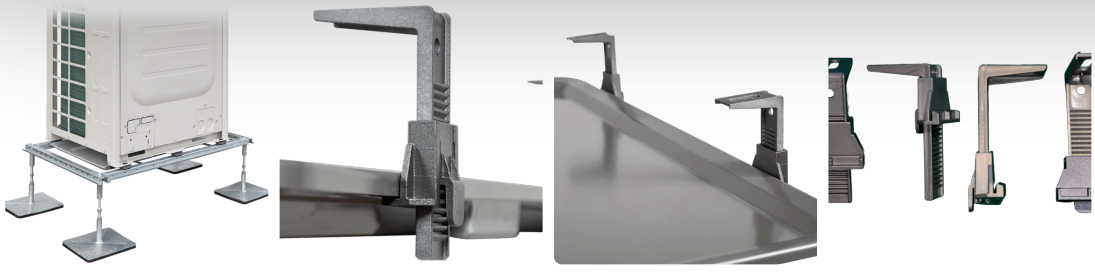

ECO Eco version -34°

CLIMALINE PRO 6 ECO

Uppvärmt tråg för större värmepumpar

Dräneringstråget är dubbelbottnat med inbyggd värmematta monterat i en metallfolie-bag,

CLIMACO

Cookiebot by Usercentrics

Consent | Details | About

This website uses cookies

We use cookies to personalise content and ads, to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media, advertising and analytics partners who may combine it with other information that you've provided to them or that they've collected from your use of their services.

Necessary

Preferences

Statistics

Marketing

Därför Climaline Pro 6 Eco

CLIMACO

Cookiebot by Usercentrics

Consent | Details | About

This website uses cookies

We use cookies to personalise content and ads, to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media, advertising and analytics partners who may combine it with other information that you've provided to them or that they've collected from your use of their services.

Necessary

Preferences

Statistics

Marketing

Överblick

För	Stor Luft-luftvärmepump Fastighets värmepumpar
Uppvärmning	Värmematta

Termostatstyrd	Två steg tillslag +2 och -8°C
Frostfri till	-34°C

Färg	Mörkgrå
Material	ABS, Komposit
Mått (mm)	632 x 610 H35
Stickkontakt	Nej, flatstift

CLIMACO

Cookiebot by Usercentrics

Consent | Details | About

This website uses cookies

We use cookies to personalise content and ads, to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media, advertising and analytics partners who may combine it with other information that you've provided to them or that they've collected from your use of their services.

Necessary

Preferences

Statistics

Marketing

Monterad

Led bort vattnet – läs mer





CLIMACO

Cookiebot by Usercentrics

Consent | Details | About

This website uses cookies

We use cookies to personalise content and ads, to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media, advertising and analytics partners who may combine it with other information that you've provided to them or that they've collected from your use of their services.

Necessary

Preferences

Statistics

Marketing

NÄR AVLOPP FINNS NÄRA

In i huset eller källaren

Led slangen längs fasaden in genom hus-, garagevägg eller grund till golvbrunn eller befintligt avloppsrör, exempelvis från ett handfat

- ✓ Mycket låg halkrisk vintertid

ENKEL VID RÄTT TOMT

Rakt ut från huset - minst 4 meter

Led slangen längs fasaden och vidare på tomten med jämnt fall till en säker plats utan risk för skada på altan, växter eller gångyta.

- ✓ Minst 4 m från hus och kontinuerligt fall

✓ Korrekt tätad genomföring

Läs om detta alternativ →

× Inte nära gångyta

Läs om detta alternativ →

Köp Climaline Pro 6 Eco

CLIMACO

Cookiebot by Usercentrics

Consent | Details | About

This website uses cookies

We use cookies to personalise content and ads, to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media, advertising and analytics partners who may combine it with other information that you've provided to them or that they've collected from your use of their services.

Necessary

Preferences

Statistics

Marketing